
**TECHNICAL CHARACTERISTICS**

Part Number	Trap Attenuation (at normal frequency) (db)	20db Band Width(KHz) 20db	3db Band Width(KHz) 3db
XT4.43MB	$\geq 25(40)$		$\geq 40(70)$
XT4.5MB	$\geq 35(45)$		$\geq 50(80)$
XT5.5MB	$\geq 35(45)$		$\geq 70(120)$
XT6.0MB	$\geq 35(45)$		$\geq 40(120)$
XT6.5MB	$\geq 35(45)$		
XT4.5MB	20	≥ 30	
XT5.5MB	20	≥ 30	
XT6.0MB	20	≥ 30	
XT6.5MB	20	≥ 30	



DIMENSION (mm)

TEST CIRCUIT

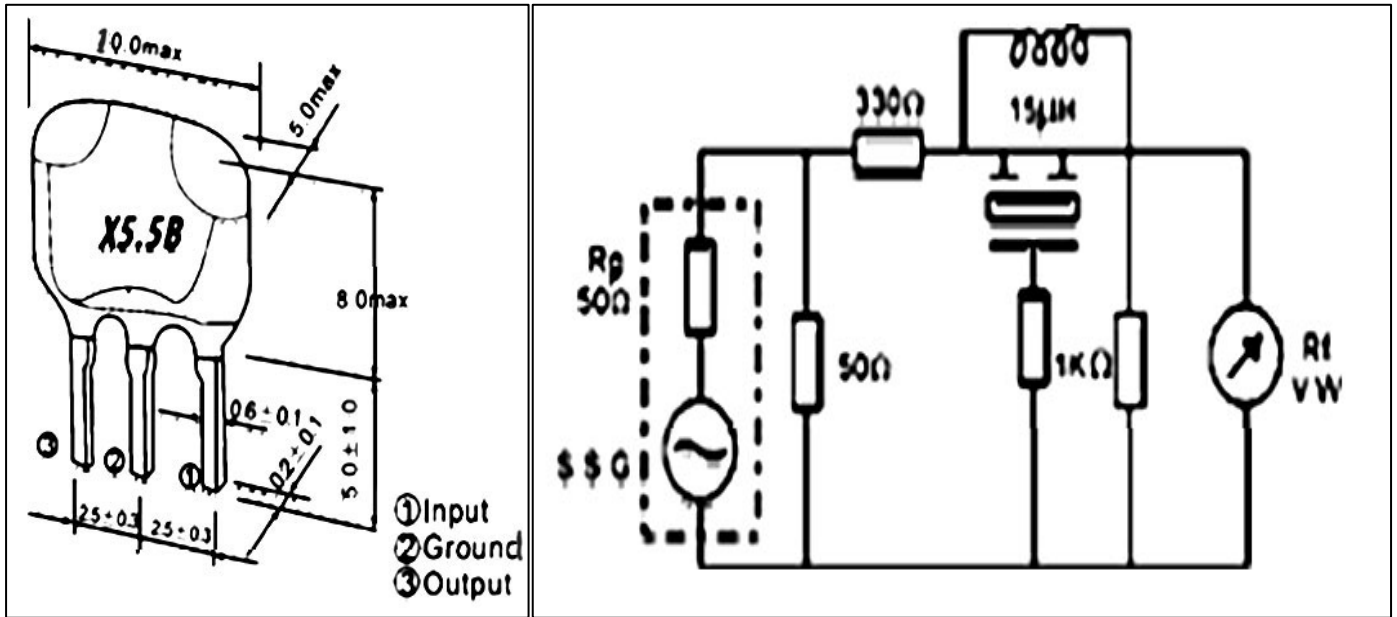

CHARACTERISTICS

